
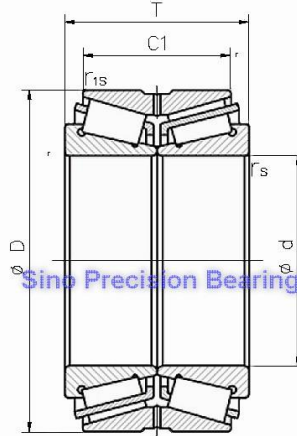


圓錐滾子軸承-雙列型

Double Rows Tapered Roller Bearings

此種軸承在承受徑向負荷的同時可承受雙向軸向負荷。可在軸承的軸向遊隙範圍內限制軸或外殼的雙向軸向位移。該種軸承一般用於中、低轉速場合。我公司還可為用戶提供特殊軸向遊隙的圓錐滾子軸承。



技術參數

軸承型號		外形尺寸						額定負荷		極限轉速		重量
Designation		Dimensions (mm)						Rated Load		Speed Limit		Weight
New	Old	d	D	C1	T	r _{sm}	r _{1sm}	Cr	Cor	Grease	Oil	kg
352940X2/YA	2097940EK	200	280	92	116	3	1	758	1423	1200	900	22
352952X2	2097952	260	360	108	134	3	1	1263	2430	900	670	36.8
352052X2	2097152	260	400	146	185	5	1.1	1955	2600	840	630	76.8
352956X2	2097956	280	380	108	134	3	1	1328	1885	820	620	41.3
350056	97156	280	420	106	133	4	2	1270	1936	820	620	58.1
352960X2	2097960	300	420	128	160	4	1	1700	4270	770	580	63
351160	1097760	300	500	152	205	5	1.5	2618	4165	710	530	143
352964X2	2097964	320	440	128	160	4	1	1326	2000	430	530	67
352064X2	2097164	320	480	160	210	5	1.1	1600	2200	400	500	122
352968X2	2097968	340	460	128	160	4	1	1575	2496	660	500	71
350068	97168	340	520	135	180	5	1.5	1904	2640	380	480	119
351168	1097768	340	580	170	242	5	1.5	2299	4277	710	530	214
350072	97172	360	540	140	185	5	1.5	1716	3068	620	460	127
350076	97176	380	560	140	190	5	1.5	1560	2670	540	410	146
351176	1097776	380	620	170	242	5	1.5	2400	4050	540	410	243

技術參數

軸承型號 Designation		外形尺寸 Dimensions (mm)						額定負荷 Rated Load (KN)		極限轉速 Speed Limit (RPM)		重量 Weight kg
New	Old	d	D	C1	T	r _{smin}	r _{1smin}	Cr	Cor	Grease	Oil	
351984	1097984	420	560	105	145	4	1.1	1060	2167	300	380	88.8
350084	97184	420	620	150	206	5	1.5	1790	3180	480	360	187
351184	1097784	420	700	200	275	6	2.5	3010	5130	480	360	392
351988	1097988	440	600	125	170	4	1.1	1390	2560	280	360	114
350088	97188	440	650	152	212	6	2.5	2000	3710	260	340	213
351992	1097992	460	620	130	174	4	1.1	1410	2630	260	340	130
351092	97192	460	680	230	175	6	2.5	3024	6732	220	300	253
351996	1097996	480	650	130	180	5	1.5	1859	3822	240	320	151
350096	97196	480	700	180	240	6	2.5	2928	5316	200	280	281
351196	1097796	480	790	224	310	7.5	3	5000	119900	180	240	561
3519/500	10979/500	500	670	130	180	5	1.5	1884	3740	220	300	159
3510/500	971/500	500	720	180	236	6	2.5	2480	6384	190	260	289
3519/530	10979/530	530	710	136	190	5	1.5	2100	3729	190	260	190
3519/560	10979/560	560	750	156	213	5	1.5	4081	8880	170	220	235
3510/560	971/560	560	820	185	260	6	2.5	4785	9216	160	200	409
3519/600	10979/600	600	800	156	205	5	1.5	2772	5832	150	190	266
3510/600	971/600	600	870	198	270	6	2.5	3828	6912	130	170	500
3519/630	10979/630	630	850	182	242	6	2.5	4095	8205	130	170	368
3511/670	10977/670	670	1090	295	410	7.5	3	9680	23200	90	120	1370
3519/710	10979/710	710	950	175	240	6	2.5	4425	9600	100	140	444
3510/710	971/710	710	1030	220	315	7.5	3	6560	17930	90	120	810
3519/750	10979/750	750	1000	194	264	6	2.5	5370	11175	90	120	499
3519/800	10979/800	800	1060	204	270	6	2.5	6086	13464	80	100	604
3519/850	10979/850	850	1120	188	268	6	2.5	6188	14042	75	95	636
3519/900	10979/900	900	1180	205	275	6	2.5	5000	16200	70	90	730
3519/950	10979/950	950	1250	220	300	7.5	3	8347	18360	70	90	909