


雙列圓錐滾子軸承 (公制)

Double-row Taper Roller Bearings (metric size)

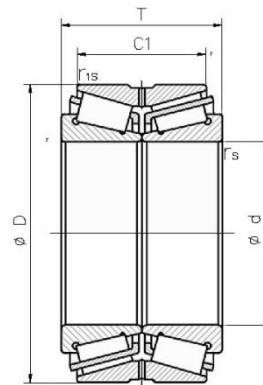

d	外形尺寸					額定負荷(KN)		重量(Kg)	軸承型號	
	D	B	C1	r _{1,2min}	r _{3,4min}	動負荷 Cr	靜負荷 Cor		現有型號	原有型號
180	250	95	74	2.5	0.6	650	1370	13.1	352936X2	2097936
	280	74	66	3	1	635	1350	19	352036X2-1	
	280	134	108	3	1	1000	1800	28.5	352036X2-2	2097136
	300	164	134	3	1	1500	2800	39.9	352136	2097736
	320	127	99	5	1.1	1060	1970	41.1	352236X2-1	
	320	190	145	5	1.1	1800	3230	59	352236X2-2	
	320	192	152	5	1.1	2200	4000	63.8	352236	97536
	340	170	140	5	1.5	1680	3170	63.2	350636	
190	260	95	75	3	1	715	1500	13.3	352938X2	209738
	290	94	75	3	1	688	1460	20	352038X2-2	
	290	134	104	3	1	1000	1850	28.8	352038X2-1	2097138
	320	104	92	4	1.5	880	1820	31.9	352138X2-2	
	320	130	104	4	1.5	1100	2330	39	352138X2-2	
	320	170	130	4	1.5	1580	2900	52	352138	2097738
	340	133	105	5	1.5	1260	2330	48.9	352238X2	
	340	204	160	5	1.5	2380	4020	69.8	352238	97538
200	280	105	80	3	1	840	1800	18.1	352940X2	2097940
	310	154	120	3	1	1270	2840	38.5	352040	2097104
	310	170	140	3	1	1350	3400	44.9	352040X2	
	320	146	110	4	1.5	1130	2840	41.5	350640	
	340	112	100	4	1.5	1020	1980	39.6	352140X2	
	340	184	150	4	1.5	1910	3510	62.5	352140	2097740
	360	142	110	5	1.5	1370	2530	58.8	352240X2	
	360	218	174	5	1.5	2900	4700	90.7	352240	97540E

雙列圓錐滾子軸承 (公制)

Double-row Taper Roller Bearings (metric size)

d	外形尺寸					額定負荷(KN)		重量(Kg)	軸承型號	
	D	B	C1	r _{1,2min}	r _{3,4min}	動負荷	靜負荷		現有型號	原有型號
						Cr	Cor			
220	300	110	88	3	1	900	2050	21.7	352944X2	2097744
	340	90	80	4	1.1	738	1560	27.8	352044X2	
	340	165	130	4	1.1	1670	3200	49	352044	2097144
	370	195	150	4	1.1	2100	3800	76.3	352144	2097744
	370	150	120	5	1.5	1440	3100	60.1	352144X2	
230	380	200	160	4	1	2120	5100	86.1	305646-1	
	410	180	120	5	1.5	1850	3840	89.5	305646-2	
	420	200	160	5	1.5	2140	4550	114	305646-3	
240	320	110	90	3	1	900	1900	22.2	352948X2-1	2097948
	320	109	90	3	1	904	2460	24	352948X2-2	
	360	92	82	4	1	836	1800	29.6	352048X2	
	360	166	128	4	1	1700	3380	52.8	352048	2097148
	400	128	114	4	1.1	1290	2730	59	352148X2-1	
	400	210	163	4	1.1	2560	4860	98.1	352148	2097748
300	400	209	168	4	1.1	2390	5500	98.5	352148X2-2	
	500	205	152	5	1.5	2890	5350	143	351160	1097760
320	500	200	160	6	2	2480	5800	144	351160X2	
	440	160	128	4	1	1900	4600	67	352964X2	2097964
	480	151	121	5	1.5	1790	4270	87.7	352964X2-1	
	480	210	160	5	1.5	2500	5200	122	352064X2-2	2097164
340	540	220	176	6	2	2840	6760	190	351164X2	
	460	160	128	4	1	2000	4680	69.7	352968X2	2097968
	500	154	110	5	1.5	1930	4560	99	350668	
	520	180	135	5	1.5	2500	4790	128	351068	97168
	520	190	169	5	1.5	2760	5790	198	351068X2	
350	580	242	170	5	1.5	3930	7200	235	351168	1097768
	590	199	140	9.5	1.5	2760	6190	197	350670	

雙列圓錐滾子軸承 (公制)
Double-row Taper Roller Bearings (metric size)

d	外形尺寸					額定負荷(KN)			重量(Kg)	軸承型號	
	D	B	C1	r _{1,2min}	r _{3,4min}	動負荷 Cr	靜負荷 Cor	現有型號		原有型號	
	360	480	160	128	4	1	2050	5100		74.3	352972X2
	540	185	140	5	1.5	2900	5800	132	351072	97172	
	600	242	170	5	1.5	4040	5700	235	351172	1097772	
	600	240	192	6	2	3980	9060	254	351172 X2		
	520	145	105	4	1.1	1600	3900	80.3	351976	1097976	
	520	149	112	5	1.5	1900	5000	82	351976X2		
380	560	190	140	5	1.5	2900	6100	146	351076		
	560	171	135	5	1.5	2430	5850	129	351076X2		
	620	242	170	5	1.5	4500	8900	264	351176	1097776	
	620	243	194	5	1.5	3800	9200	265	351176X2		
385	550	220	180	6	1.5	3560	7600	170	350677		
	540	150	105	4	1.1	1650	4000	86.9	351980	1097980	
	540	140	100	5	1.5	1610	3800	81.8	351980X2		
400	600	206	150	5	1.5	3500	8600	180	351080	97180	
	600	159	148	5	1.5	3340	8060	177	351080X2		
	650	250	200	6	2	4420	11100	306	351180X2		
	560	145	105	4	1.1	2300	4720	81	351984	1097984	
420	620	206	150	5	1.5	3600	7500	196	351084	97184	
	620	190	125	6	1.5	2240	5500	184	351084X2		
	700	275	200	6	2.5	5800	10000	392	351184	1097784	
	600	170	125	4	1.1	2580	5800	114	351988	1097988	
440	650	212	152	6	2.5	3700	8400	213	351088	97188	
	720	283	226	6	3	5380	12600	418	351188X2		
	620	174	130	4	1.1	2600	5900	128	351992	1097992	
460	680	230	175	6	2.5	4500	9700	253	351092	97192	
	760	300	210	7.5	3	6180	14500	506	351192		

雙列圓錐滾子軸承 (公制)
Double-row Taper Roller Bearings (metric size)

d	外形尺寸					額定負荷(KN)		重量(Kg)	軸承型號	
	D	B	C1	r _{1,2min}	r _{3,4min}	動負荷	靜負荷		現有型號	原有型號
						Cr	Cor			
480	615	120	94	3	1	1590	4540	80	350696	
	650	180	130	5	1.5	2670	6300	133	351996	1097996
	700	240	180	6	2.5	4500	9800	281	351096	97196
	700	275	200	6	3	4710	12900	350	351096X2	
	790	310	224	7.5	3	6850	14300	561	351196	1097796
490	640	179	144	7.5	2	2650	8130	139	350698	
	670	180	130	5	1.5	2930	7120	156	3519/500	10979/500
500	720	236	180	6	2.5	4600	10100	289	3510/500	971/500
	720	209	176	6	3	3810	9850	258	3510/500X2	
	830	330	264	7.5	4	7380	17600	669	3511/500X2	
520	672	180	130	5	1.5	2840	7190	142	3506/520	
	710	190	136	5	1.5	3370	9520	189	3579/530	
	780	231	185	6	3	4780	12500	351	3510/530X2	
530	870	340	272	7.5	4	7770	19200	754	3511/530X2	
	735	225	180	6	1.5	3910	12400	236	3506/560	
	750	213	156	5	1.5	3490	8470	235	3519/560	10979/560
	820	260	185	6	2.5	5900	12900	410	3510/560	971/560
560	920	350	280	7.5	4	8520	20600	856	3511/560X2	
	900	300	200	6	3	6550	16730	700	3506/580	
	800	205	156	5	1.5	4390	11300	256	3519/600	10979/600
600	870	270	198	6	2.5	6680	15000	5000	3510/600	971/600
	980	388	300	7.5	4	10100	26000	1080	3511/600X2	
630	800	180	140	6	2	3220	10400	210	3506/630	
	850	242	182	6	2.5	5100	12400	368	3519/630	10979/630
	920	265	212	7.5	4	6390	17200	556	3510/630X2	
	1030	389	315	7.5	4	10620	27000	1210	3511/630X2	

雙列圓錐滾子軸承 (公制)
Double-row Taper Roller Bearings (metric size)

d	外形尺寸					額定負荷(KN)		重量(Kg)	軸承型號	
	D	B	C1	$r_{1,2min}$	$r_{3,4min}$	動負荷	靜負荷		現有型號	原有型號
						Cr	Cor			
660	830	180	140	6	2	3370	11200	230	3506/660	
	980	288	230	7.5	3	7290	19900	689	3510/670X2	
670	1090	410	295	7.5	3	13200	27800	1370	3511/670	10977/670
	1090	392	336	7.5	3	11320	29300	1360	3511/670X2	
700	980	350	270	7.5	4	8820	26700	763	3506/700-1	
	1070	348	240	7.5	4	9050	24600	1040	3506/700-2	
710	950	240	175	6	2.5	5960	14400	422	3519/710	10979/710
	1030	315	220	7.5	4	8900	21500	810	3510/710	
	1030	295	236	7.5	4	7760	20800	748	3512/710X2	
	1150	393	345	9.5	5	12070	30900	1530	3511/710X2	
750	1000	255	190	6	2.5	6140	16300	507	3519/750X2	
	1090	250	220	7.5	4	5980	15700	732	3510/750X2	
	1220	365	321	9.5	5	11530	28400	1620	3511/750X2	
800	1060	370	204	6	2.5	6800	18000	604	3519/800	10979/800
	1150	258	227	7.5	4	6980	19600	845	3510/800X2	
	1280	375	330	9.5	5	11960	29900	1780	3506/800	
850	1120	268	188	6	2.5	7500	20200	636	3519/850	10979/850
	1220	340	272	7.5	4	10280	28700	1210	3510/850X2	
900	1180	275	205	6	2.5	6800	19400	730	3519/900	10979/900
	1280	350	280	7.5	4	111100	32500	1360	3510/900X2	
950	1250	300	220	7.5	3	9300	25300	910	3519/950	10979/950
	1280	280	246	7.5	4	8440	25800	986	3506/950	
	1360	375	300	7.5	4	12600	37100	1670	3510/950X2	
1120	1460	335	250	9.5	4	11700	33400	1344	3519/1120	10979/1120
1370	1605	210	150	7.5	4	5700	23700	660	3506/1370	

雙列圓錐滾子軸承 (英制)

Double-row Taper Roller Bearings (inch size)

d	外形尺寸					額定負荷(KN)			重量(Kg)	軸承型號	
	D	T	B	r _{1,2min}	r _{3,4min}	動負荷 Cr	靜負荷 Cor	現有型號		原有型號	
177.8	247.65	90.448	90.448	1.5	3.3	670	1590	13	3706/177.8-1		
	288.935	123.825	123.825	1.5	3.3	1320	2420	31	3706/177.8-2		
203.2	317.5	133.35	133.35	1.5	3.3	1190	2550	39	3706/203.2		
206.375	282.575	87.312	87.312	1.5	3.3	720	1760	17	3706/206.375		
234.95	327.025	93.662	93.662	1.5	3.3	860	2250	25	3706/234.95		
254	358.775	130.175	130.175	1.5	3.3	1570	3760	43	3706/254-1		
	438.15	165.1	165.1	3.3	6.4	2560	4500	98	3706/254-2		
269.875	381	136.525	136.525	3.3	3.3	1680	3980	50	3706/269.857		
279.587	380.898	117.475	117.475	1.5	3.3	1260	3390	41	3706/279.857		
280	389.5	92	92	3	3	1180	2080	31	370656		
300.038	422.275	150.812	150.812	3.3	3.3	2090	5040	69	3706/300.038		
303.212	495.3	263.525	263.525	1.5	6.4	4660	10390	208	3706/303.212		
317.5	422.275	128.588	128.588	3.3	3.3	1710	4400	50	3706/317.5		
333.375	469.9	166.688	166.688	1.5	3.3	2500	6040	91	3706/333.375		
343.052	457.098	122.238	122.238	1.5	3.3	1540	3600	53	3706/343.052		
346.075	488.95	174.625	174.625	3.3	3.3	2600	6360	108	3706/346.075		
368.3	523.875	185.738	185.738	3.3	6.4	3200	7950	130	3706/368.3		
384.175	546.1	193.675	193.675	3.3	6.4	3540	8800	149	3706/384.175		
406.4	546.1	138.113	138.113	1.5	6.4	2250	5400	87	3706/406.4		
409.575	546.1	161.925	161.925	1.5	6.4	2560	7000	108	3706/409.575		
415.925	590.55	209.55	209.55	3.3	6.4	3900	10230	188	3706/415.925		
430	600	200	200	1.5	4	3300	8600	174	370686	87986	
447.625	635	223.838	223.838	3.3	6.4	4500	11660	231	3706/447.625		
450	595	178	178	3	6	3030	86460	137	3706/450	307690	
489.026	634.873	152.4	152.4	3.3	6	2800	7790	127	3706/489.026		
501.65	673.1	184.15	184.15	3.3	6.4	4000	10300	186	3706/501.65-1		
	711.2	250.825	250.825	3.3	6.4	5610	14500	323	3706/501.65-2		
519.112	736.6	258.762	258.762	3.3	6.4	6170	16540	363	3706/519.112		

雙列圓錐滾子軸承 (英制)

Double-row Taper Roller Bearings (inch size)

外形尺寸						額定負荷(KN)		重量(Kg)	軸承型號	
d	D	T	B	r _{1,2min}	r _{3,4min}	動負荷 Cr	靜負荷 Cor		現有型號	原有型號
536.575	761.873	269.875	269.875	3.3	6.4	6400	16960	402	3706/536.575	
570	750	240	240	6	6	5090	14600	280	3706/570	
571.5	812.8	285.75	285.75	3.3	6.4	7350	19080	490	3706/571.5	
580	830	280	280	3	6	6900	17600	505	3706/580	
600	820	172	172	6	6	4240	9000	251	3706/600	
609.6	787.4	171.45	171.45	3.3	6.4	4100	11300	214	3706/609.6-1	
	820	171.45	171.45	3.3	6.4	4100	11300	260	3706/609.6-2	
650	1030	270	270	6	6	8980	19400	882	3706/650	
660.4	812.8	176.212	176.212	3.3	6.4	3650	11900	191	3706/660.4	
682.625	965.2	338.138	338.138	3.3	6.4	9700	26500	799	3706/682.625	
800	1260	375	375	8	8	15000	35500	1813	3706/800	
863.6	1130.3	323.85	323.85	4.8	12.7	10800	32800	877	3706/863.6	
939.8	1333.5	463.55	463.55	4.8	12.7	17900	51900	2186	3706/939.8	